

ANSL Series

Absolute Shaft Encoder

Maximum Resolution...13 Bit = 8,192

Shaft Diameters 10, 11 or 12mm

MECHANICAL SPECIFICATIONS

Maximum RPM	6000
Torque	>0.05Nm
Loading	Axial 60N, Radial 50N
Weight	850g
Temperature	-20°C to +70°C

ELECTRICAL

Current Consumption	50mA
Max. output frequency of LSB	50kHz

NOTE: Short circuit protection on all wires

NOTE 1: Gray code encoders with a non cyclic output code (360, 720 etc) have a zero off-set applied. This ensures that only one bit changes between the highest value and the home or zero positions.

e.g. An encoder with 360 divisions for each rotation of the shaft, will read between 76 and 435 only.

PCA AUS	
Function	Plug Pin
0 Volts	1 White
+ Volts	2 Brown
Bit 1 - 2 ⁰	3 Green
Bit 2 - 2 ¹	4 Yellow
Bit 3 - 2 ²	5 Grey
Bit 4 - 2 ³	6 Pink
Bit 5 - 2 ⁴	7 Blue
Bit 6 - 2 ⁵	8 Red
Bit 7 - 2 ⁶	9 Black
Bit 8 - 2 ⁷	10 Violet
Bit 9 - 2 ⁸	11 Grey/Pink
Bit 10 - 2 ⁹	12 Red/Blue
Bit 11 - 2 ¹⁰	13 White/Green
Bit 12 - 2 ¹¹	14 Brown/Green
CW/CCW Select	15 Yellow/Brown
	16

NOTE: For other wiring and plug combinations refer to data sheet "Plug & Wiring Variations"



FEATURES

The ANSL encoders are suitable for most industrial applications. The series provides a heavy duty body and up to 13 Bits resolution.

The direction select control wire determines the relationship between the rotation of the shaft and the count direction of the output. With the wire tied to the + the output value will increase as the shaft turns clockwise (CW), when the wire is connected to the 0 Volt supply the output will increase as the shaft turns counter clockwise (CCW).

Switching the optional "zero reset" input, from the positive to the negative supply for a minimum of .5 Seconds, will force the output code to reset to zero regardless of the shaft position. This provides a simple way to synchronise the encoder output to the machine physical zero position.

To ensure long-term reliability, each encoder must be mounted in accordance with the installation instructions. Refer to the Accessories section for our range of couplings and mounting hardware.

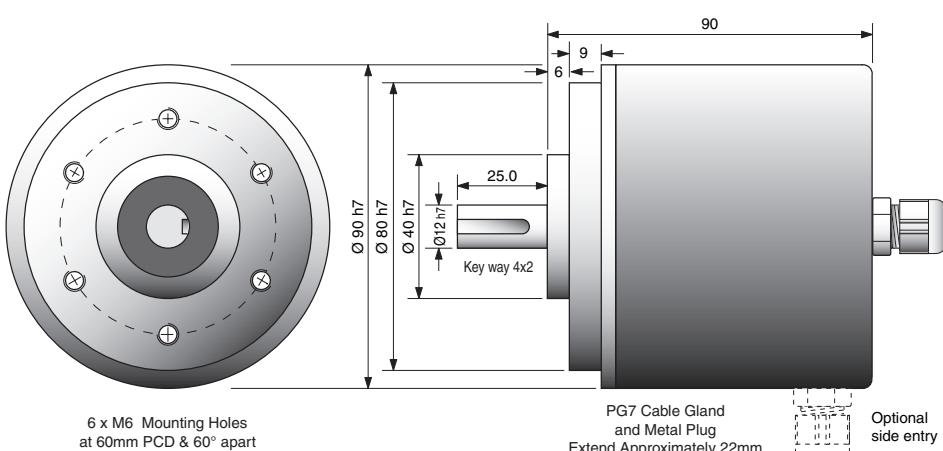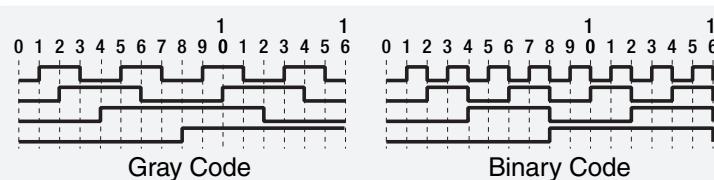

Part Number Selection Guide

Series	5	6	7	8	9	10	11	12	Bit Range
A	N	S	L	—	—	—	—	—	9-13 Bits 00512-08192
Stainless Shaft	—	—	—	—	—	—	—	—	Voltage & Output Type
Shaft	10 to 12mm	—	—	—	—	—	—	—	5 Volt TTL - Line Driver ... 1 8 to 30V - Push/Pull M
Housing Material	IP65 Aluminium / Steel ..	B	Wiring Entry	R	—	—	—	—	Output Options
IP65 Aluminium / Steel ..	B	R	Rear or Axial	R	—	—	—	—	None Fitted A Remote Zero Reset 7
Wiring Method	—	—	Side or Radial	S	—	—	—	—	Output Code
Cable 2 Meters	2	—	—	—	—	—	—	—	Gray A
Cable 5 Meters	3	—	—	—	—	—	—	—	Binary B
Cable - Custom Length ..	4	—	—	—	—	—	—	—	
Plug 16 Pin Metal	M	—	—	—	—	—	—	—	
Plug 17 Pin Metal	S	—	—	—	—	—	—	—	

A product of the world wide GESgroup made by W+S Germany Sold and serviced in Australia by **PCA**